

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B064/16-PZ**
- (3) Product: **Anchor device type C
Type: SEAMFIX Line System**
- (4) Manufacturer: **Eyecatcher BV**
- (5) Address: **Teddingtonweg 28G, 2421 NIEUWKOOP, THE NETHERLANDS**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 16-109.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 **DIN CEN/TS 16415:2013**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2021-06-08.




DEKRA EXAM GmbH
Bochum, 2016-06-09

Signed: Wiegand
Certification Body

Signed: Christochowitz
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body

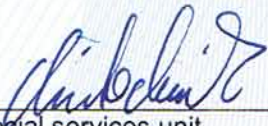
Special services unit

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B064/16-PZ
- (14) 14.1 Subject and type
Anchor device type C
Type: SEAMFIX Line System

14.2 Description

The anchor device type C, type: SEAMFIX Line System consists of a wire rope anchor line made of corrosion-resistant steel (\varnothing 8 mm, variant 7 x 19) and is intended for temporarily protection up to a maximum of 3 persons against falls from a height (fig. 1). On both ends the anchor line is provided with a compressed end stop. It is not possible to override the ends of the anchor line.

As end and intermediate anchors the anchor devices Seamfix in the variants Seamfix 450 and Seamfix 660 can be used. These two variants differ in the adjustment range of the sliding plates. The anchor device of variant Seamfix 450 has an adjustment range of 260 mm to 450 mm for the sliding plates and the variant Seamfix 660 has an adjustment range of 420 mm to 660 mm for the sliding plates.

When used as an intermediate anchor and as a curve the attachment eyelet will be replaced by a corresponding drive-over bracket.

At one end of the anchor line there is a force limiter with fall indicator. If the structure of the system is performed with a curve, a force limiter will be necessary at each end.

On the anchor line there runs the mobile anchor point, type: Shuttle which can only be removed from the anchor line by two independent hand moves. The mobile anchor point is intended to pass through the intermediate structural anchors and is rotatable around the anchor line's axis. The user can connect his personal protective equipment to the eyelet of the mobile anchor point to protect himself against falls from a height. The anchor device, type: SEAMFIX Line System is mounted horizontally and at the user's level by means of intermediate and end anchors on suitable substrates with sufficient strength with appropriate fastening elements on the building.

The anchor device is intended for load from any direction parallel to the contact area and consists of corrosion-resistant material.

The initial stress of the wire rope anchor line is between 0.8 kN and 1.5 kN whereas the distance of two anchors may be between 5 m and 15 m.

Note: The attachment of the anchor device to the building is not part of this type examination.

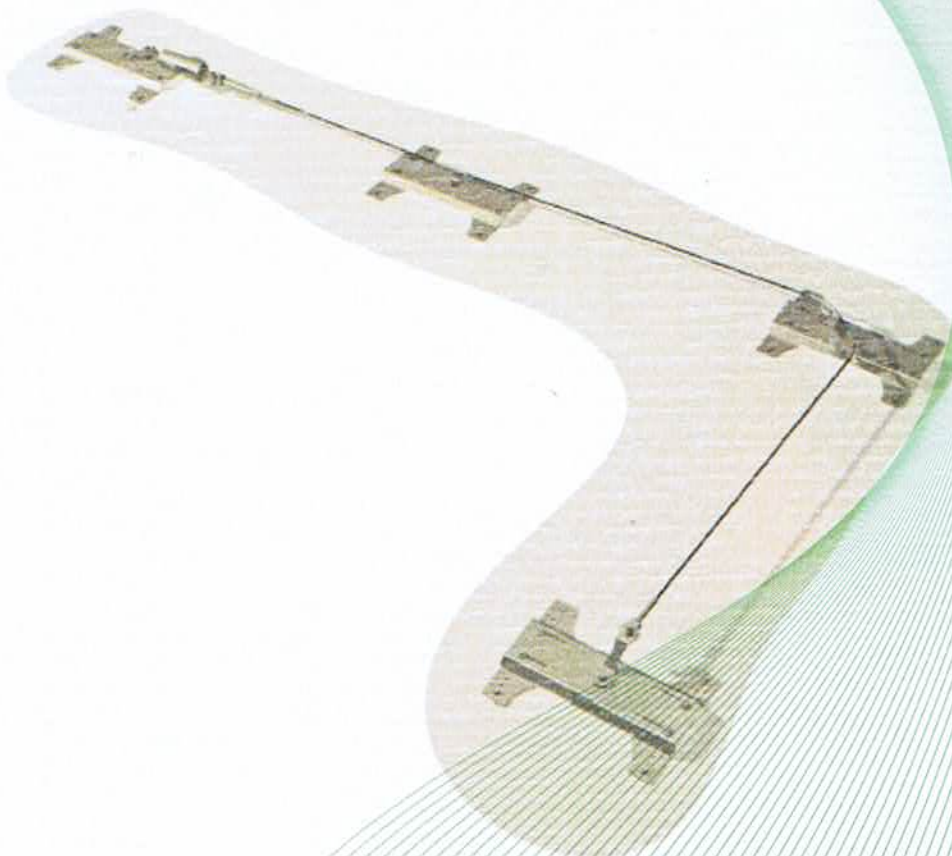


Fig. 1: Anchor device, type: SEAMFIX Line System

(15) Test Report

PB 16-109, 2016-06