

TWISTFIX EVO Life Line System EN-795:2012 type C



Product information

- Tested for metal, concrete, wooden roof structures
- Easy to waterproof
- Innovative and patented energy absorber
- Two persons between each line section
- Certified by DEKRA Exam GmbH
- EN-795:2012 type C & TS 16415:2013
- Each post is labelled with a unique ID-number
- Product warranty 15 years

Technical information

- Toggle bolts for Wooden and Metal roof structures
- Mechanical anchor for Concrete structures
- Fall forces to roof structure < 11 kN
- Posts height 12 cm
- Posts Aluminium and orange colour coated
- Brackets and Steel Wire made of Stainless Steel
- Dynamic posts

Pictures of Line System parts



End post



Energy Absorber



Intermediate post



Tensioner





Corner post



Shuttle

Marking & information

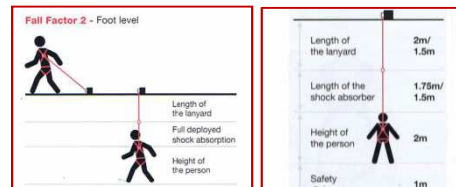

Calculating your fall arrest and safe working height

Calculations using a fall arrest lanyard fixed at foot level

	2m Lanyard	1.5m Lanyard
Lanyard Length	2m	1.5m
Energy Absorber	1.75m	1.75m
Body Height	2m	2m
Deflection Line	1.5m	1.5m
Safety Distance	1m	1m
Minimum Clearance	8.25m	7.5m

